

# HXL 6440X(OG/IG)

Min. 117mm

Max. 1942mm

Capacity 4000kg



## 4.0 Ton Low Profile Scissor Lift With dual side draw-out extension

### Technical Features



#### Control

Control cabinet with UP, Down button, main power switch, emergency stop button, power indication light and buzzer



#### Drive-on Ramp

Drive-on ramps which can be locked on level as platform extension



#### Synchronization

Patented mechanical synchronization device which stops lowering while any of two platforms are blocked



#### Limit Switch

Sensor type up limit switch and lowering limit switch with buzzer warning



#### One-keyLeveling

One-key leveling button inside control box makes leveling of platforms simple



#### Grease Point



Grease point on all shafts to reduce wear out of components



#### Rubber Pad


A set of four rubber pads as standard accessory

### Technical Drawing

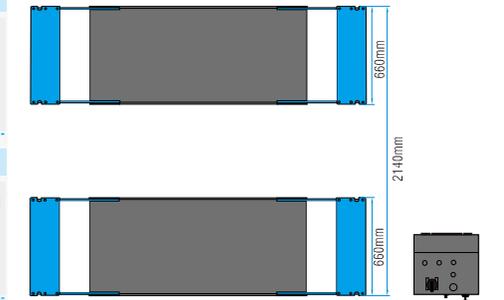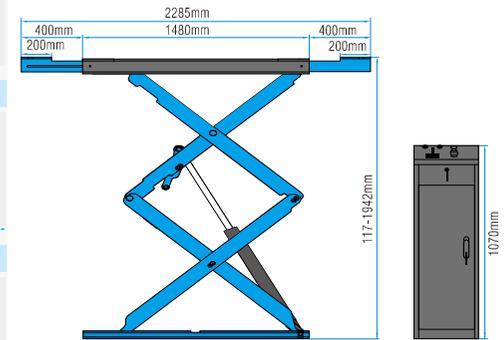

### Technical Data

Lifting Capacity	4,000kg
Min. Height	117mm
Max. Lifting Height	1,942mm
Platform Length	1,885-2,285mm
Platform Width	660mm
Distance between Platforms	820mm
Lifting/Lowering Time	≥ 20sec
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph

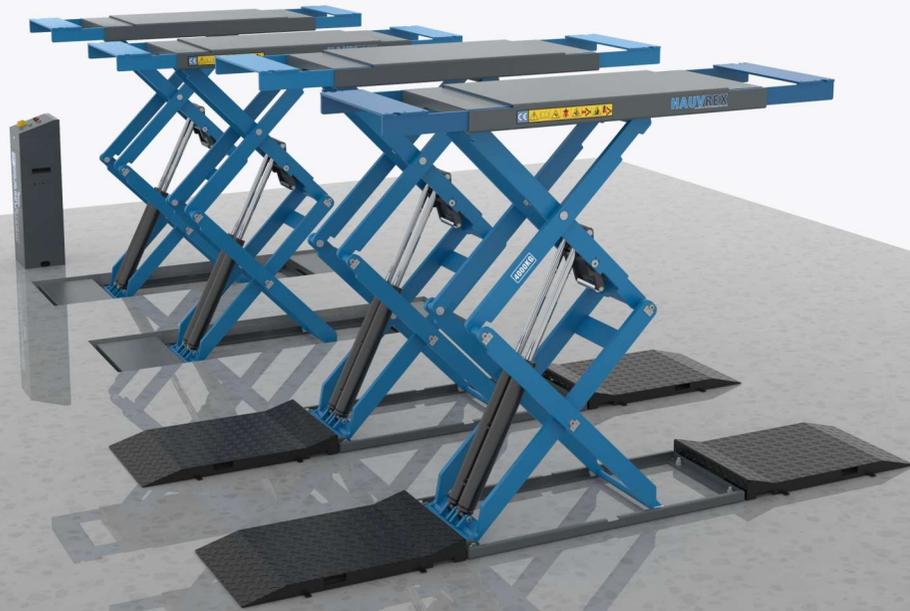

Note: OG for on-ground installation  
IG for in-ground installation

