
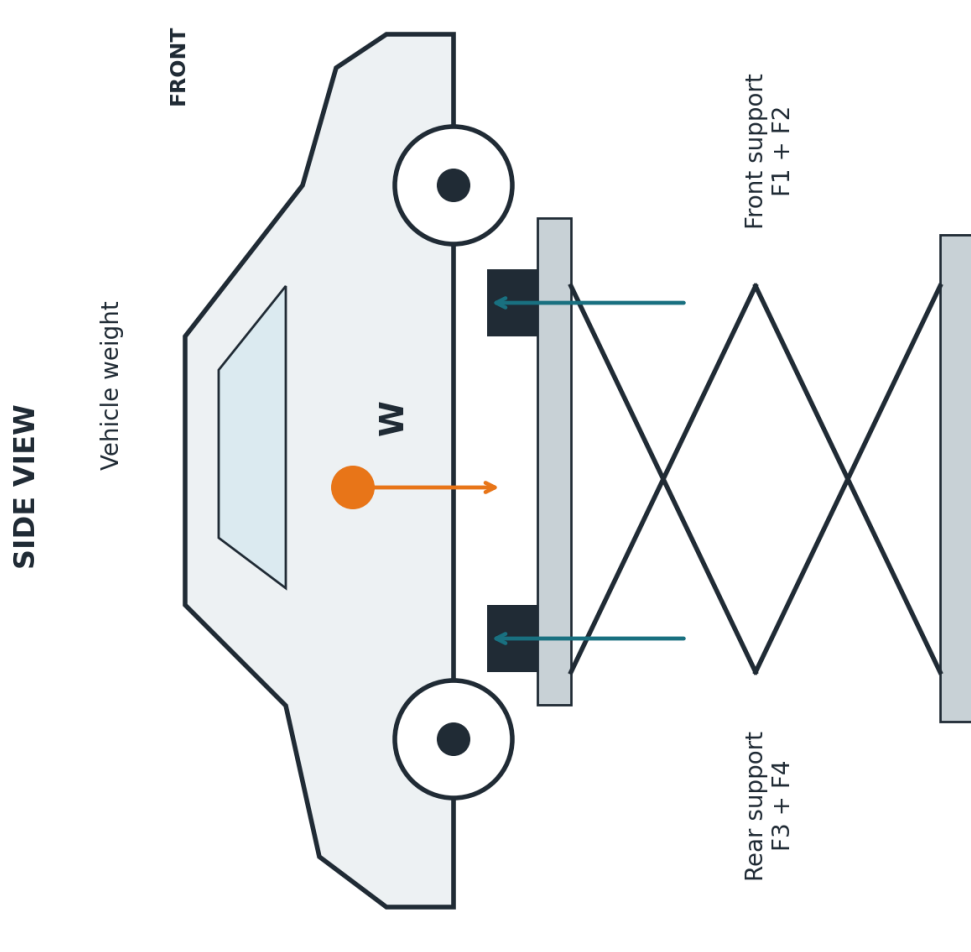


Oreiko HYCLCB3000

Vehicle load distribution on the lifting platforms

Illustration only. Not to scale. No permitted front/rear or left/right load ratio is specified.

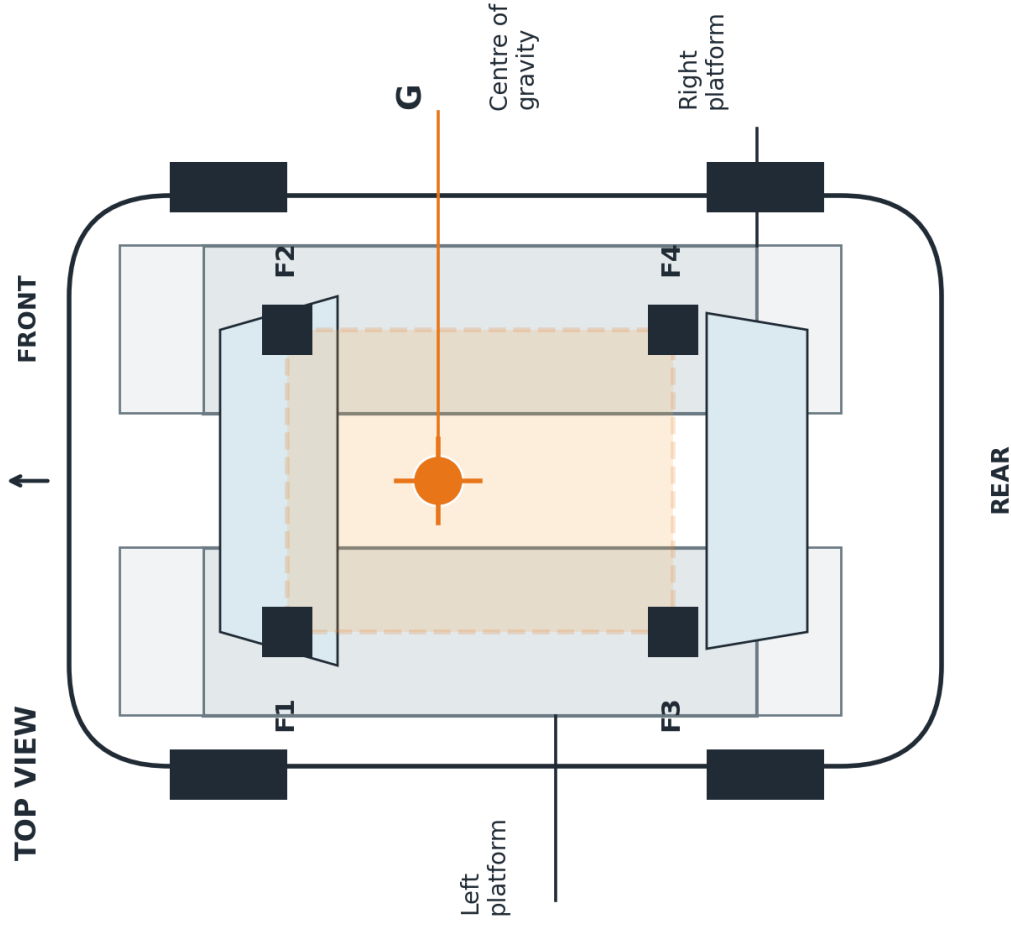

$$F1 + F2 + F3 + F4 = W$$

Four approved lifting points must remain fully supported.

Position pads at the vehicle manufacturer approved lifting points. Load limits require model specific confirmation.