

HTL 2850

Min. 110mm

Max. 1900mm

5000kg Capacity



5.0 Ton Two-post Lift with Base

Automatic solenoid lock release, reinforcement bar



Technical Features




Control
24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH




Lifting Arms
Symmetric 3+3 stages lifting arms




Lifting Pad
Drop-in type dual stage threaded lifting arm pads



Arm Locks
Automatic arm locking during lifting and automatic unlocking when the arm reaches the floor



Arm Holder
C-type enclosed arm holder give more strength and safety



Foot Protection
Lifting arms equipped with foot protection bars





Reinforcement Bar
Reinforcement bar for bad concrete floor



Power Pack
Power pack with aluminum motor

Technical Drawing

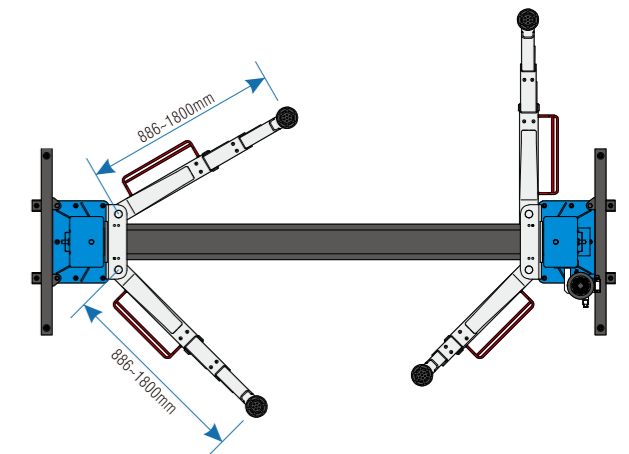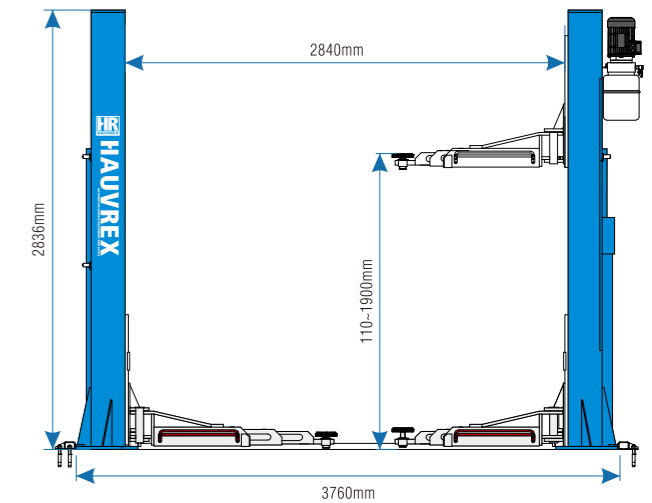

Technical Data

Lifting Capacity	5,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	2,836mm
Overall Width	3,760mm
Width between Posts	2,840mm
Lifting Arm Length	886-1800mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	3.0kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph

